
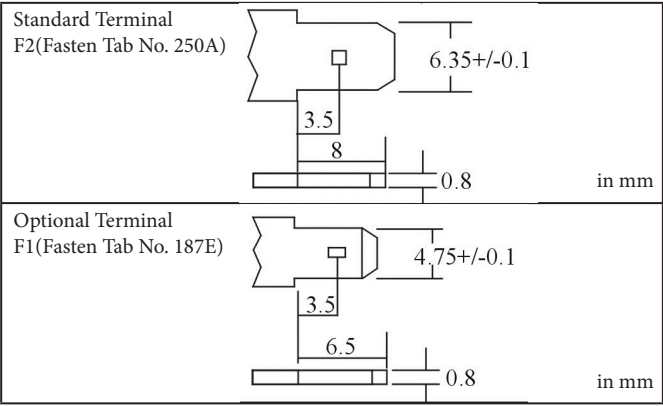


PHYSICAL SPECIFICATION

Nominal Voltage		12V
Nominal Capacity (20HR)		12AH
Dimensions	Length	151 ± 1mm (5.94 inches)
	Width	99 ± 1mm (3.90 inches)
	Container Height	96 ± 2 mm (3.78 inches)
	Total Height	101 ± 1mm (3.98 inches)
Weight		Approx 3.22 kg (7.0 lbs)
Standard Terminal		F2-Fasten Tab No. 250A

PRB1212T(12V12AH)

Major Application(s):
Powerpack

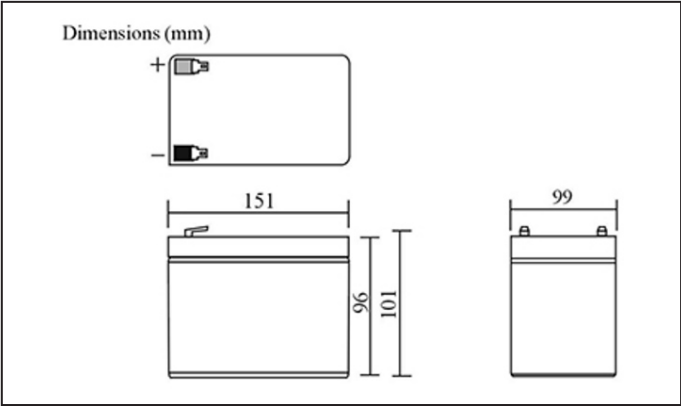

ELECTRICAL SPECIFICATION

Capacity	20 hour rate (0.60A)	12.0AH	It is recommended to use constant-voltage charge and recharge immediately after use	
	10 hour rate (1.08A)	10.8AH		
	5 hour rate (1.92A)	9.6AH	Constant-Voltage Charge	Cycle
	1 hour rate (7.20A)	7.2AH		Initial Charging Current less than 3.6 A Voltage 14.4V~15.0V at 25°C (77°F) Temperature Coefficient -30mV/°C
Capacity Affected by Temperature	40°C (104°F)	105%	Constant-Voltage Charge	Standby
	25°C (77°F)	100%		Voltage 13.5V~13.8V at 25°C (77°F) Temperature Coefficient -20mV/°C
	0°C (32°F)	85%		
Internal Resistance	Fully charged battery (25°C, 77°F) 25mΩ			

