

PHYSICAL SPECIFICATION


Nominal Voltage		12V
Nominal Capacity (20HR)		26AH
Dimensions	Length	166 ± 1mm (6.54 inches)
	Width	176 ± 1mm (6.93 inches)
	Container Height	128 ± 2mm (5.04 inches)
	Total Height	128 ± 2mm (5.04 inches)
Weight		Approx 7.6 kg (16.72 lbs)
Standard Terminal		F2-Fasten Tab No. 250A

PRB1226T(12V26AH)


Major Application(s):
Power System & UPS




Dimensions (mm)

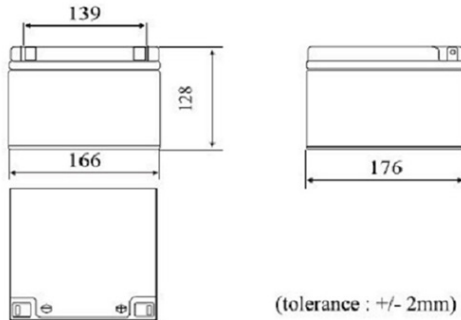


Standard Terminal
F2(Fasten Tab No. 250A)

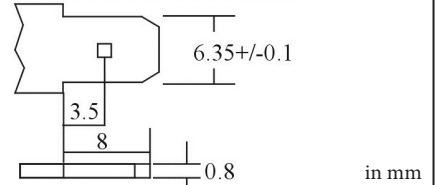

Optional Terminal
B1(copper) Bolt Type: M5



Optional Terminal
B2(lead) Bolt Type: M5



ELECTRICAL SPECIFICATION

Capacity	20 hour rate (1.25A)	25.0AH	It is recommended to use constant-voltage charge and recharge immediately after use
	10 hour rate (2.40A)	24.0AH	
	5 hour rate (4.10A)	20.5AH	
	1 hour rate (13.20A)	13.2AH	
Capacity Affected by Temperature	40°C (104°F)	105%	Constant-Voltage Charge Cycle Initial Charging Current less than 6.0A Voltage 14.4V~15.0V at 25°C (77°F) Temperature Coefficient -30mV/°C
	25°C (77°F)	100%	
	0°C (32°F)	85%	Standby Voltage 13.5V~13.8V at 25°C (77°F) Temperature Coefficient -20mV/°C
Internal Resistance	Fully charged battery (25°C, 77°F) 15mΩ		

