



# MANUAL STATIONS



The RMS manual pull station is a high quality non toxic die-cast manual pull station manufactured entirely in the U.S.A. Low profile design and smooth edges offer an attractive yet functional design. All components are prepainted or have plated surfaces to inhibit corrosion. Electrically the RMS manual pull station is unbeatable with 10 amp snap action switch offered in all possible contact arrangements (including gold contacts). The RMS pull station can be used with or without a break glass rod with replacement requiring no special tools.

Other features include

- Lift and pull
- Break glass cover
- Institutional key lock
- Weather and explosion proof versions
- All stations offer hex screw or key lock access
- Private labeling and special options also available

UL No.  
11S4



Explosion Proof

Lift and Pull

Weather Proof

Institutional



RMS-EXP ( )

RMS ( )-LP

RMS ( ) WP

RMS ( )-KO

( ) represents switch type plus pigtail leads or terminal block connections



Made in the U.S.A.





RMS IT Shown

# CONSTRUCTION MATERIAL

- Painted Die Cast Housing
- 14 Ga Plated Steel Back Plate
- Corrosion Inhibited Surfaces
- Terminal Block (4 Position)
- Single Gang Mounting
- 10 AMP Snap Action Switch (S.P.S.T., S.P.D.T.)

## SPECIFICATIONS

### Electrical

Switch	10 amp @ 120vac
Gold Contact	1.0 amp @ 120vac
Key Switch	0.5 amp @ 30vdc
Phone Jack	0.1 amp @ 24vdc

### Dimensions

Station	Width	3.200in
	Length	4.750in
	Depth	0.875in

Weight	15.5oz/420 grams
Mount	Single gang


RMS-DAH	Width	3.325in
	Length	4.750in
	Depth	1.625in

Weight	1lb 9oz/756 grams
--------	-------------------

RMS-LP	Width	3.325in
and LPH	Length	4.750in
	Depth	1.500in

Weight	1lb 4oz/560 grams
--------	-------------------

## ORDERING INFORMATION

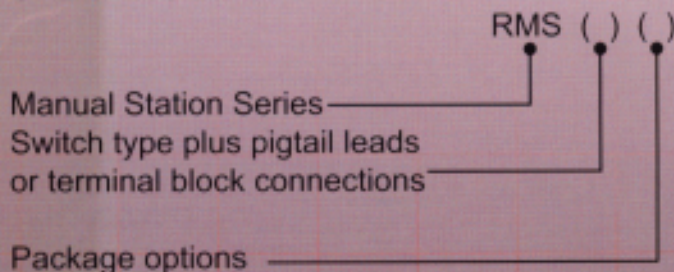

### Options (add to above)

- 1P S.P.S.T. with pigtails
- 1T S.P.S.T. with terminal block
- 2T D.P.S.T. with terminal block
- 6T D.P.D.T. with terminal block
- PS Presignal key switch 0.5 amp @ 30vdc
- LP Lift and pull dual action adaptor
- LPH Lift and pull dual halon adaptor
- LED Light emitting diode (red/green/yellow)
- GCS S.P.D.T. Gold Contact 1.0amp @ 120vac
- GCD D.P.D.T. Gold Contact 1.0amp @ 120vac
- PJ Phone Jack 0.1amp @ 24vdc
- KL Key lock access (specify key type)
- BB Surface mounting back box
- EXC Exit alarm only sign

Example: RMS-IT-LP-KL  
Single pole throw switch with terminal block,  
lift and pull cover and key lock access

Note: Meets UL, FM, CSFM and BSA requirements. Quality pricing/Private labeling available.