



5860

Remote Annunciator

The 5860 remote annunciator, can be used to operate and program Honeywell Silent Knight fire alarm control panels (FACPs) from anywhere within the system.

The 5860 features include an 80-character backlit LCD providing easy-to-understand system messages. The annunciator is ergonomically designed with over-sized buttons for the most frequently used features, like Reset and Silence.

In addition to status messages displayed on the LCD, there are five LEDs for alarm, supervisory, trouble, silence, and AC power status.

The 5860 annunciator is available in gray to match virtually any decor and red for applications where the annunciator must stand out. The annunciator enclosure can be surface or flush mounted. A trim ring kit is available for surface mounting.

COMPATIBILITY

The 5860 is compatible with the following Honeywell Silent Knight FACPs:

- 6820:** Addressable fire alarm control panel with up to 1,110 addressable points
- 6820EVS:** Addressable fire alarm control panel with an emergency communication systems and up to 1,110 addressable points
- 6808:** Addressable fire alarm control panel with up to 198 addressable points
- 6700:** Addressable fire alarm control panel with up to 100 addressable points
- 5820XL:** Addressable fire alarm control panel
- 5820XL-EVS:** Addressable fire alarm control panel with an emergency communication systems
- 5808:** Addressable fire alarm control panel
- 5700:** Addressable fire alarm control panel

FEATURES & BENEFITS

- 80-character backlit LCD display (4 lines with 20 characters per line)
- Tactile / audible feedback when a key is pressed on the annunciator
- Uses the RS-485 SBUS to interface with the panel
- Support for simultaneous use of multiple 5860s
- Easily view current status by alarms, supervisories, or troubles
- Five Status LEDs
- Available in red or light gray color
- Accommodates wiring lengths up to 6000 ft. from the control panel for added design and install flexibility
- Accepts user codes or fire fighter's key
- Larger keypad buttons makes it easier to maneuver for system reset and silencing



5860 / 5860R

5860 Technical Specifications


For a complete listing of all compliance approvals and certifications, please visit www.silentknight.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

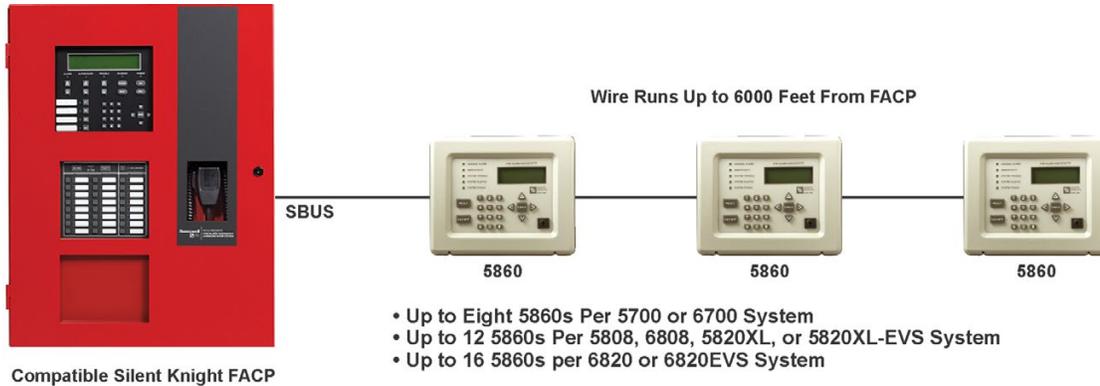

5860 Features

PHYSICAL

Dimensions: 9.1"W x 7.4"H x 1.5"D (23.1W x 18.8H x 3.8D cm)

Shipping Weight: 2.8 lbs (1.3 kg)

Color: 5860R: Red; 5860: Gray

ENVIRONMENTAL

Operating Temperature: 32°F to 120°F (0°C to 49°C)

Humidity: 10% - 93% non-condensing)

ELECTRICAL

Operating Voltage: 24VDC

Standby Current: 20mA

Alarm Current: 25mA

ORDERING INFORMATION

5860: Remote Annunciator, four line (4x20) LCD annunciator with 20 characters per line. Gray

5860R: Remote Annunciator, four line (4x20) LCD annunciator with 20 characters per line. Red

ACCESSORIES

5860TR: Red Trim Ring for surface mounting

5860TG: Gray Trim Ring for surface mounting

AGENCY LISTINGS AND APPROVALS

UL listed

CSFM approved

Meets NFPA 72 requirements

FM approved

MEA approved

For more information

Learn more about Honeywell Silent Knight and other products by visiting www.silentknight.com

Honeywell Silent Knight

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350224 | Rev J | 12/17
© 2017 Honeywell International Inc.

