

# HALOTRON® I

## RUGGED

- 6-Year manufacturer's warranty
- Stored pressure design
- Dependable drawn-steel cylinders
- Durable high-gloss polyester powder paint
- All-metal valve construction
- Temperature range -40°F to 120°F

## USER-FRIENDLY

- Maximum visibility during discharge
- No electrical conductivity back to the operator
- No thermal or static shock
- Leaves no residue
- QR coded and multilingual labels

## ENVIRONMENT

- Low Global Warming Potential (GWP) 0.0098, CFC-11=1.0
- Low Ozone Depletion Potential (ODP)—77,100 yr. CO2 time horizon
- Short atmospheric lifetime


## OPTION

- Extinguishers are USCG approved with bracket listed on UL label
- Chrome cylinders (see chart at right)

**HALOTRON® I** clean fire extinguishing agent discharges as a rapidly evaporating liquid, which is non-conductive, noncorrosive, and leaves behind no residue. Halotron® I is the clean agent market leader with a history of successful real-world protection of valuable assets. From model-scale aircraft to wide-body commercial aircraft, from data centers to pharmaceutical and other industrial plants, the Halotron® I agent has been used to extinguish the fire, limit damage, and help reduce downtime that can be caused by other agents.

Applications for these extinguishers include: data centers, laboratories, manufacturing plants, general office areas, computer rooms, telecommunication facilities, clean rooms, control rooms, warehouses, military electronics, vehicles including classic autos, boats, engine compartments, aircraft ramps, onboard aircraft, and in facilities that service aircraft and any facility where dry chemical extinguishers could cause unacceptable damage or contamination.

### AVAILABLE IN 65 AND 150 LB. WHEELED EXTINGUISHERS

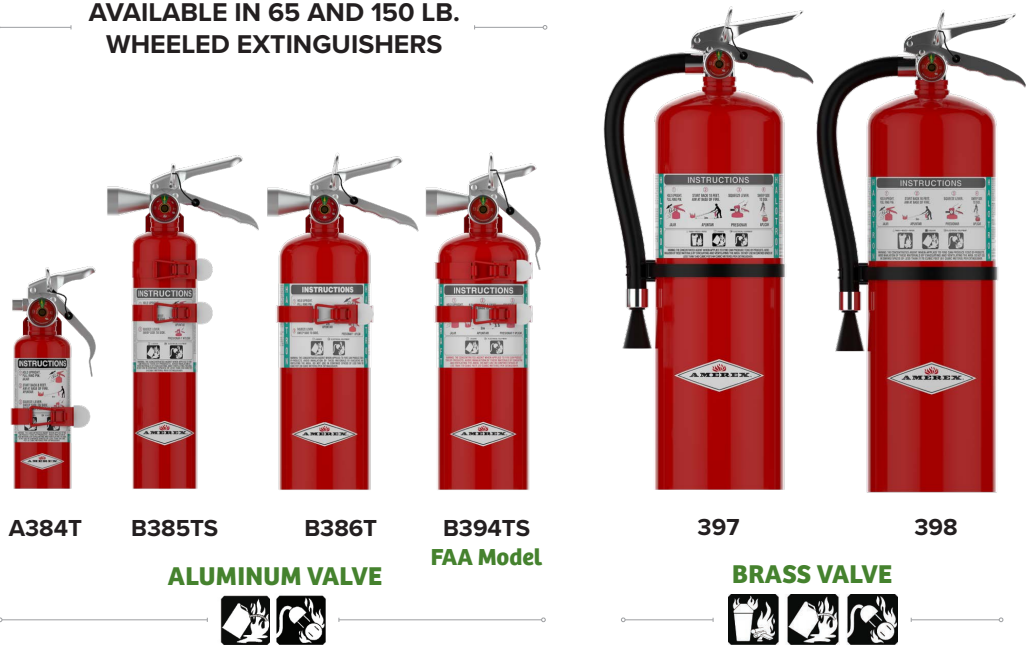

### FAA APPROVED MODELS AVAILABLE (SEE CHART BELOW)

| AGENT TYPE                                    | HALOTRON® I       |          |          |          |                     |          |
|---|-------------------|----------|----------|----------|---------------------|----------|
| VALVE TYPE                                    | Anodized Aluminum |          |          |          | Chrome-Plated Brass |          |
| DESIGN  | Nozzle            |          |          |          | Hose & Nozzle       |          |
| MODEL NUMBER                                  | A384T             | B385TS   | B386T    | B394TS   | 397                 | 398      |
| UL & ULC RATING                               | 1B:C              | 2B:C     | 5B:C     | 5B:C     | 1A:10B:C            | 2A:10B:C |
| CAPACITY (LBS.)                               | 1.4               | 2.5      | 5        | 5.5      | 11                  | 15.5     |
| SHIPPING WT. (LBS.)                           | 3.25              | 5.25     | 9.5      | 10       | 22.5                | 27.5     |
| HEIGHT (IN.)                                  | 10                | 15.5     | 15.25    | 15       | 21.88               | 21.88    |
| WIDTH (IN.)                                   | 3.5               | 6.38     | 5.75     | 5.13     | 9.25                | 9.25     |
| DEPTH (IN.)                                   | 2.63              | 3        | 4.25     | 4.25     | 6                   | 6        |
| RANGE (INITIAL- FT.)                          | 6-8               | 6-10     | 9-15     | 9-15     | 9-15                | 12-18    |
| DISCHARGE TIME (SEC.)                         | 9                 | 9        | 9        | 9        | 9                   | 14       |
| OPTIONAL CHROME CYLINDER                      | Yes               | Yes      | Yes      |          |                     |          |
| MINIMUM CONFINED SPACE REQUIREMENTS (CU. FT.) | 196               | 350      | 700      | 770      | 1540                | 2170     |
| NOMINAL OPERATING PRESSURE                    | 125 PSIG          | 100 PSIG | 100 PSIG | 150 PSIG | 125 PSIG            | 125 PSIG |
| FAA APPROVED MODEL                            |                   |          |          | Yes      | Yes                 | Yes      |
| INCLUDED BRACKET                              | Vehicle           | Vehicle  | Vehicle  | Aircraft | Wall                | Wall     |

**MANUFACTURED AND TESTED TO UL STANDARDS**  
COMPLIES WITH NFPA 10 STANDARD  
ISO-9001/ ISO-14001 CERTIFIED UL LISTED

**CONFORMS TO TEST STANDARDS:**  
CAN/ULC-S566 - UL 2129 &  
CAN/ULC-S508 - UL 711

