

LOW-PROFILE LED EMERGENCY LIGHTS

Illumination

- Two adjustable 1 watt (per head) ultra-bright white LED lamp heads
- Chrome-plated metallized reflector and plastic lens for optimal light distribution

Electrical

- Dual 120/277 VAC
- Charge rate/power "ON" LED indicator light and push-to-test switch for code compliance testing
- 3.6V maintenance-free, rechargeable NiCad battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Solid-state, two-rate charger fully recharges battery in 24 hours



BLEDR1



BLEDR1B

Mounting

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections
- K/O available for conduit application
- Suitable for wall or ceiling mount

Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact-resistant thermoplastic in white or black finish


Options

- Self-diagnostic feature performs monthly, biannual and annual test to ensure reliable operation and meet electrical and life safety codes (Part Number BELR1LEDSDT)

Warranty/Listing

- Five year warranty
- UL listed in accordance with UL924
- UL listed for damp locations (32°F - 122°F)

Dimensions

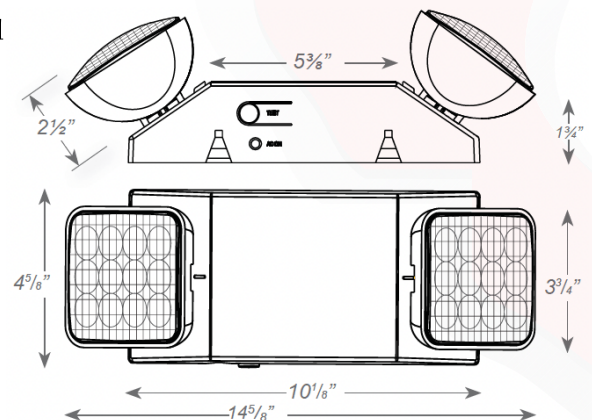

Brooks Equipment • 10926 David Taylor Dr. • Suite 300 • Charlotte, NC 28262
800.826.3473 (P) • 800.433.9265 (F) • Sales@BrooksEquipment.com
www.BrooksEquipment.com