

D1xCP1-PS Explosion Proof Manual Pull Station

The D1xCP1-PS is a cast aluminium manual alarm pull station available in a dual action configuration. These explosion proof stations have a DPDT switch mounted in heavy duty cast aluminium housings.

The solid design and rugged construction of the D1xCP1-PS station makes it ideal for use in harsh operating environments and hazardous locations. The D1xCP1-PS manual station is UL listed for use in the various classifications of hazardous environments shown in the specification table. The device has a NEMA type 4X rating for operation in extreme weather conditions and plant wash down applications. It is also UL Marine listed for operation in highly corrosive environments.

Features


The D1xCP1-PS dual action model features a “PUSH” bar that moves inward, allowing the “PULL” handle to be grasped and operated by a single hand. The activated station is reset by opening the station with a key, placing the handle in the normal upright position, and re-locking the station.

- Explosion Hazard Classifications
Class I, Div. 1, Group B, C and D
Class II, Div. 1, Group E, F and G
Class III, Div. 1
- Marine and NEMA type 4X Rated
- DPDT switch with screw terminal connection
- Dual Action
- DC and AC Voltage Contact Ratings
- Key Reset
- SIL2 compliant

Approvals

- UL
- MEA
- SIL2 compliant



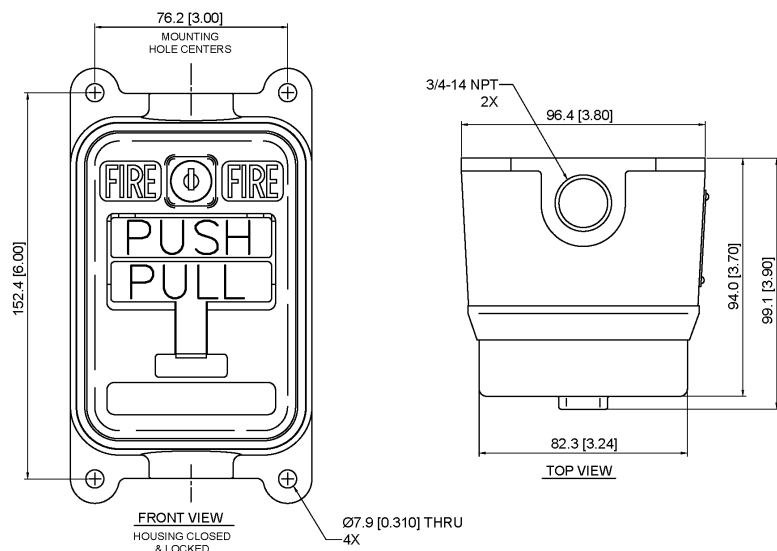

Specification

Listings:	UL, MEA
Temperature:	-40°C to +65°C [-40° to 150°F]
Relative humidity:	95% at 20°C [68°F]
Switch Type:	Double Pole, Double Throw (DPDT)
Switch Rating:	1 Amp @ 30 VDC 10 Amp @ 120 VAC
IP Rating:	NEMA Type 4X (UL)
Other:	UL Marine Listed
Pull Station Weight:	4.8 lbs
Pull Station Dimensions:	6 5/16" h x 3 1/4" w x 3 7/8" d
Conduit Fittings:	Two - 3/4" - 14 NPT
Color:	Red with raised white letters white "PULL" bar and white "PUSH" bar (Dual Action) with raised red letters

Part Codes

Version:	Part code:	Description:
Product type:	D1XCP1PS	D1XCP1-PS Manual Pull Station
Switch Type: [s]	D	DPDT/DPCO
Cable entries: [e]	D	2 × 3/4"NPT -Default
	A	1 × 3/4"NPT & 1 × M20 (adaptor)
	B	2 × M20 (adaptors)
	C	2 × 1/2"NPT (adaptors)
Stopping plug: [m]	N	1 × 3/4"NPT Nickel Plated Brass
	S	1 × 3/4"NPT Stainless Steel
	X	None - Default (Cable entry option B, C or D)
Duty label /	1	No Duty label, no Equip. tag
Equipment tag: [s]:	2	Duty label Stainless Steel
	3	Duty label St/St + Equip. tag
	6	Equip. tag only
	7	Special label requirement
Version: [v]	A1	UL, SIL2
Enclosure color:	R	Red
	[x]	
Accessories:	SP65-0001-A4:	Pole Mount Bracket Kit St/St A4 (316)
	SP65-0002-A4:	Sunshade - St/St A4 (316)



Brooks Equipment • 10926 David Taylor Dr, Suite 300 • Charlotte, NC 28262 • 800.826.3473 (P) • 800.433.9265 (F)

Sales@BrooksEquipment.com • www.BrooksEquipment.com

No liability is accepted for any consequence of the use of this document. The technical specification of this unit is subject to change without notice due to our policy of continual product development. All dimensions are approximate. This unit is sold subject to our standard conditions of sale, a copy of which is available on request.