

D2xL2F 124dB(A) 25W Hazardous Location Speaker

The D2xL2F is a 25W PA loudspeaker with re-entrant flare horn. A high SPL in a robust Type 4/4X, IP66 marine grade, corrosion proof aluminium enclosure ensures suitability for all Class I/II Div 2 and Zone 2 & 22 hazardous location applications.

The re-entrant flare horn is high impact, fire retardant thermoplastic and is field replaceable – the driver employs a standard 1 3/8" -18 male thread coupling. All models have triple cable entries and duplicated terminals.

The large termination chamber and cover feature a threaded flameproof joint simplifying both installation and routine maintenance.

Features

- Sound output up to 124dB
- Dual 25V/70V or 100V line transformer
- Multiple transformer tapings
- Field replaceable flare component
- Ratchet adjustable 316 stainless steel bracket
- Triple cable entries
- Robust marine grade aluminium enclosure
- Duplicated cable terminations
- UL 1480A (Ed 1) – Speakers for Commercial and Professional Use
- CSA C22.2 No. 205 (Ed 3) – Signal Equipment
- UL 1480 (Ed 6) – Speakers for Fire Alarm and Signaling Systems,
- CAN/ULC-S541 (Ed 4) – Speakers for Fire Alarm and Signaling Systems



Approvals

- UL/cUL File ref: E230764
- IECEx Certificate: IECEx ULD 19.0008X
- ATEX Certificate: DEMKO 19 ATEX 2141X
- UKCA certificate: UL21UKEX2132X
- CSFM listing: 7136-2279:0503

Coding

- NEC/CEC Class Div
 - Class I Div 2 Group ABCD T3 Ta -55°C to +85°C
 - Class I Div 2 Group ABCD T3A Ta -55°C to +80°C
 - Class I Div 2 Group ABCD T3B Ta -55°C to +65°C
 - Class I Div 2 Group ABCD T3C Ta -55°C to +60°C
 - Class II Div 2 Group FG T4 Ta -55°C to +85°C
 - Class III Ta -55°C to +85°C
- NEC Class Zone
 - Class I Zone 2 AEx ec IIC T3 Gb Ta -55°C to +75°C
 - Zone 22 AEx tc IIIC T119°C Dc Ta -55°C to +75°C
- CEC Class Zone
 - Ex ec IIC T3 Gc -55°C to +75°C
 - Ex tc IIIC T119°C Dc -55°C to +75°C
- IECEx / ATEX
 - II 2G Ex ec IIC T3 Gc Ta -55°C to +75°C
 - II 2D Ex tc IIIC T119°C Dc Ta -55°C to +75°C

See product manual for full product specific coding.





Specification

Sound pressure level:	104dB +/-3dB @ 1W @ 1m (Pink) 119dB +/-3dB @ 25W @ 1m (Rated) 124dB(A) @ 1 m at 1.3Khz (Max)
Rated power:	25 Watts RMS
25/70v line taps:	25W/12.5W/6W/2W/1W taps 25V: z=196/392/816.67/1.225K/2.45K/4.9K Ohm 70V: z=25/50/104.17/156.25K/312.5K/625 Ohm
100v line taps:	25W/12.5W/6W/2W taps z=400 Ohms/800 Ohms/ 1.67K Ohms/5K Ohms
Low impedance:	8 Ohm or 16 Ohm
Q Factor:	2.7 @ 500Hz, 3.0 @ 1KHz, 7.7 @ 2KHz, 14.7 @ 4KHz, 14.7 @ 8KHz
Directivity Index:	4.4 @ 500Hz, 4.8 @ 1KHz, 8.8 @ 2KHz, 11.7 @ 4KHz, 11.7 @ 8KHz
Frequency range:	400Hz to 8000 Hz
DC Line monitoring:	2.2µF Capacitor (Transformer) 470µF Capacitor (Low impedance)
Ingress protection:	EN60529: IP66/67 UL50E / NEMA250: 4/4X/3R/13
Enclosure material:	Marine grade LM6 aluminium alloy
Enclosure color:	Red or Grey, custom colours available on request
Enclosure finish:	Chromate & powder coated finish
Cable entries:	1 × 1/2"NPT & 2 x M20 Thread adaptors available
Stopping plugs:	Brass, Nickel Plated or Stainless Steel
Terminals:	0.5-2.5mm ² (20-14 AWG) Duplicated terminals
Grounding stud:	M5
Enclosure volume:	<2 litres
Installation temp:	NEC/CEC: -55° to +80°C [-67° to +176°F] CEC/IECEX/ATEX: -55° to +75°C [-67° to +167°F]
Storage temp:	-55° to +85°C [-67° to +185°F]
Relative humidity:	99%
MTBF V100/V070/V725:	630.69 years / 5,524,861 hours – MIL 217
MTBF R008/R016:	830.22 years / 7,272,727 hours – MIL 217
Weight:	Transformer versions: 4.5kg/9.9lbs Low impedance version.: 4.2kg/9.1lbs

Part Codes

Part Code:	Identifier: Description:	
Product type:	D2xL2	D2xL2 25W Loudspeaker
Horn type:	F	Flare re-entrant horn
Type:	V100 V725 R008 R016	100V Line Transformer 25/70V Line Transformer 8 Ohm Low impedance 16 Ohm Low impedance
Cable entries: [e]	A B C D F G Note:	2 x M20x1.5mm & 1 × 1/2"NPT 2 × 1/2"NPT – adaptors 2 × 3/4"NPT – adaptors 2 x M25x1.5mm – adaptors 1 × 3/4"NPT – adaptor 1 x M25x1.5mm – adaptor All entries, excluding thread adaptors, supplied with stopping plugs installed.
Stopping plug/ adaptor material: [m]	B N S	Brass Nickel plated brass Stainless steel
Bracket material: [s]	1 3 5	A4 316 Stainless Steel A4 316 St/St with Equip. Tag A4 316 St/St with Equip. Tag and Duty Label
Product version: [v]	A	UL, cUL, ULC, IECEx, ATEX
Product option: [o]	1 X	Standard product Custom configuration
Enclosure color: [x]	R G S	Red Grey Special color
Accessories:		
SP65-0001-A4		Pole Mount Bracket Kit St/St A4 (316)
SP65-0003-A4		Sunshade – St/St A4 (316)

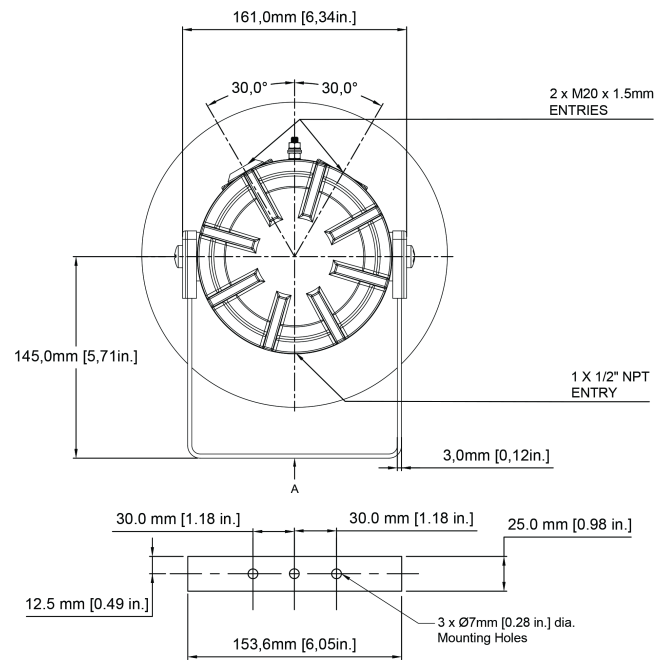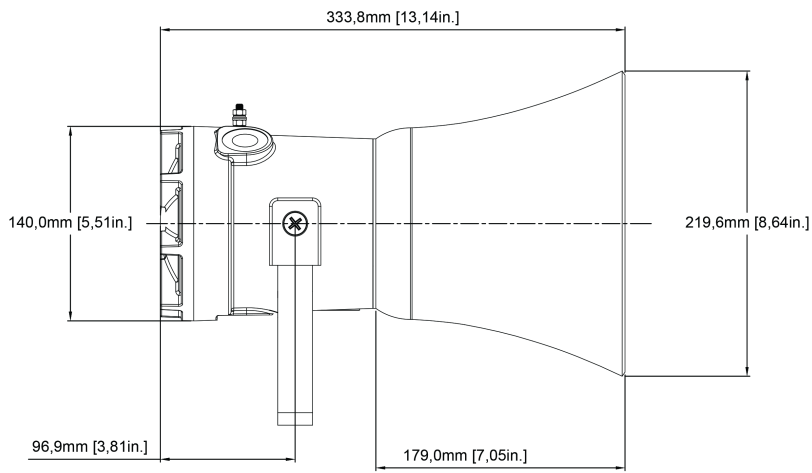

Brooks Equipment • 10926 David Taylor Dr, Suite 300 • Charlotte, NC 28262 • 800.826.3473 (P) • 800.433.9265 (F)

Sales@BrooksEquipment.com • www.BrooksEquipment.com

No liability is accepted for any consequence of the use of this document. The technical specification of this unit is subject to change without notice due to our policy of continual product development. All dimensions are approximate. This unit is sold subject to our standard conditions of sale, a copy of which is available on request.