



Professional Smart Security


## Indoor Motion Sensor

### Pet Immune

Model: RE611P

Alula's indoor motion sensor provides real-time information when motion is detected. Our versatile, long-lasting sensor is designed for both residential and commercial applications which enables protection for a wide range of installations. Many are compatible with systems made by other manufacturers including: Honeywell/Resideo, Qolsys, 2GIG and GE/Interlogix.

Protect residential installs without false alarms caused by pets. With adjustable sensitivity levels, this wireless PIR is designed to monitor for human movement while intelligently ignoring pets.

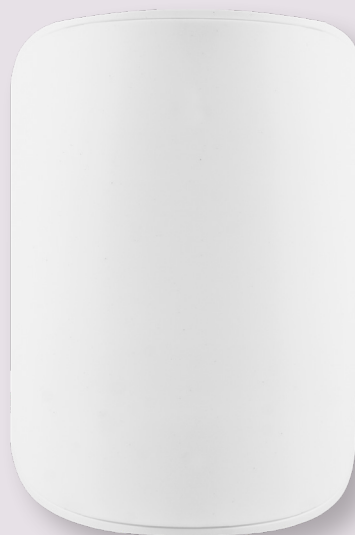

[alula.com/intrusion](http://alula.com/intrusion)

- » 90° detection range
- » Range up to 40 feet
- » Pet immunity up to 85 lbs
- » Qolsys & GE/Interlogix compatible
- » Adjustable sensitivity levels
- » 5-year warranty

## Specifications

SKU	CAM-DB-JS1	Transmitted Indications	Motion, Tamper, Low Battery, Supervision
Frequency	319.5 MHz	Mounting Height	7.5 feet (2.3 m)
Battery	CR123A Lithium	Pet Immunity	Up to 85 lbs
Battery Life	5 years	Compatibility	RE111P w(Qolsys, GE/Interlogix)
Battery Voltage	3.0 VDC (Nominal), 2.2 VDC (Low)	Dimensions	3.50 x 2.40 x 1.70 in
Current Draw	12.1 mA (Maximum), 8.2 uA (Standby), 24.2 mA (Walk test max)	Weight w/ Battery	2.9 oz
Detection Range	Up to 40 Feet (12 m)	Operating Temp	32° - 120°F
		Max Humidity	95% non-condensing relative humidity